




ZX420i/430i series

The best combination of Compact and Robust Design

Innovating upon extensive customer feedbacks, GoDEX 's most cost-effective and space-saving Industrial printers, the ZX420i/ZX430i series, integrates industrial utility with its high performance and exquisite design. The ZX420i/ZX430i series not only remains its classic design, but also provides features with



Options

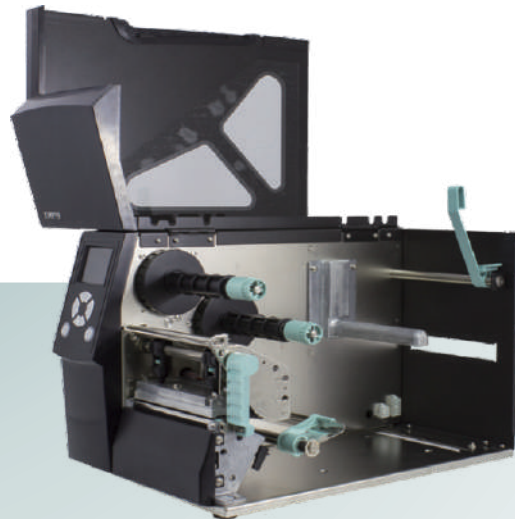

- Multiple connectivity
- Auto Calibration button included
- A full line of accessories
- Easy ribbon/ media loading
- Full-range adjustable label sensor

- 32-bit CPU that offers fast "first label out" throughput
- Fast print speed - up to 6 ips
- Upgrade version for 2.4" Color TFT LCD and operation panel for easy and intuitive operation

ZX420i/430i series Thermal Transfer Light Industrial Printer

Model Name		ZX420	ZX420i	ZX430	ZX430i
Print Method		Thermal Transfer / Direct Thermal			
Resolution		203 dpi (8 dots/mm)		300 dpi (12 dot/mm)	
Print Speed		6 ips (152 mm/s)		4 ips (102 mm/s)	
Print Width		4.25" (108mm)		4.16" (105.7mm)	
Print Length		Min. 0.16" (4 mm)** ; Max . 157.44" (3999mm)		Min. 0.16" (4 mm)** ; Max. 73.19"(1859 mm)	
Processor		32-bit RISC CPU			
Memory Flash SDRAM		128 MB Flash (60 MB for user storage) 32 MB			
Sensor Type		Adjustable reflective sensor and transmissive sensor, left aligned			
Type		Continuous form, gap labels, black mark sensing, and punched hole; label length set by auto sensing or programming			
Width		Tear : Min. 1" (25.4 mm) – Max. 4.64" (118 mm) Cutter : Max. 4.61" (117 mm)			
Media Thickness		Dispenser / Rewind : Max. 4.64" (118 mm) Min. 0.003" (0.076 mm) – Max. 0.01" (0.25 mm)			
Label roll diameter		Max. 8" (203.2 mm) with 3" (76.2 mm) core			
Core diameter		Max. 6" (152.4 mm) with 1.5" (38.1 mm) core Max. 5" (127 mm) with 1" (25.4 mm) core Min. 1" (25.4 mm) – Max. 3" (76.2 mm)			
Ribbon Types		Wax, wax/resin, resin			
Length		Max. 1476' (450 m)			
Width		Min. 1.18" (30 mm) – Max. 4.33" (110 mm)			
Ribbon roll diameter		3" (76.2 mm)			
Core diameter		1" (25.4 mm)			
Printer Language		EZPL, GEPL, GZPL auto switch			
Software Label design software		GoLabel (for EZPL only)			
Driver		Windows 2000, XP, Vista, Windows 7, 8.1 and 10 , Windows Server 2003 & 2008 , MAC, Linux			
DLL		Win CE, .NET, Andriod, Windows Mobile, Windows 2000 / XP / VISTA / 7 / 8.1 / 10			
Resident Fonts Bitmap Fonts		6, 8, 10, 12, 14, 18, 24, 30, 16X26 and OCR A & B Bitmap fonts 90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable			
TTF Fonts		Bitmap fonts 8 times expandable in horizontal and vertical direction TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable			
Download Fonts Bitmap Fonts		90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable			
Asian Fonts		16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese(GB2312), Japanese (S-JIS), Korean (KS-X1001)			
TTF Fonts		90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable			
Barcodes 1-D Bar Codes		China Postal Code, Codabar, Code 11, Code 32,Code 39, Code 93, Code 128 (subset A, B, C), EAN -8, EAN-13, EAN 8/13 (with 2 & 5 digits extension), EAN 128, FIM, German Post Code, GS1 DataBar, HIBC, Industrial 2 of 5 , Interleaved 2-of-5 (12 of 5), Interleaved 2- of 5 with Shipping Bearer Bars, ISBT – 128, ITF 14, Japanese Postnet, Logmars, MSI, Postnet, Plessey, Planet 11 & 13 digit, RPS 128, Random Weight, Standard 2 of 5, Telepen, UPC -A, UPC-E, UPC-A and UPC-E with EAN 2 or 5 digit extension, UCC 128, UCC/EAN-128 K-Mart			
2-D Bar Codes		Aztec code, Code 49,Codablock F ,Datamatrix code, MaxiCode, Micro PDF417, Micro QR code, PDF417,QR code, TLC 39			
Code Pages		Codepage 437, 737,850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869, Windows 1250, 1251, 1252, 1253, 1254, 1255, 1257 Unicode UTF8, UTF16BE, UTF16LE			
Graphics		Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software			
Interfaces		<ul style="list-style-type: none"> • USB 2.0 (B-Type) • Serial port: RS-232 (DB-9) • IEEE 802.3 10/100 Base-Tx Ethernet port (RJ-45) • USB Host (A-Type) 		<ul style="list-style-type: none"> • USB 2.0 (B-Type) • Serial port: RS-232 (DB-9) • IEEE 802.3 10/100 Base-Tx Ethernet port (RJ-45) • USB Host (A-Type) 	
Control Panel		<ul style="list-style-type: none"> • 1 Power on/standby button with green color LED backlight • 1 Calibration button at rear panel • 1 Control key : FEED / PAUSE / CANCEL with dual color LED backlight: Ready (Green); Error (Red) 	<ul style="list-style-type: none"> • Color TFT LCD with navigation button • 1 Power on/standby button with green color LED backlight • 1 Calibration button at rear panel • 1 Control key : FEED / PAUSE / CANCEL with dual color LED backlight: Ready (Green); Error (Red) 	<ul style="list-style-type: none"> • 1 Power on/standby button with green color LED backlight • 1 Calibration button at rear panel • 1 Control key : FEED / PAUSE / CANCEL with dual color LED backlight: Ready (Green); Error (Red) 	<ul style="list-style-type: none"> • Color TFT LCD with navigation button • 1 Power on/standby button with green color LED backlight • 1 Calibration button at rear panel • 1 Control key : FEED / PAUSE / CANCEL with dual color LED backlight: Ready (Green); Error (Red)
RTC Power		Standard Auto Switching 100-240V AC, 50-60Hz			
Environment Operation temperature		41°F to 104°F (5°C to 40°C)			
Storage temperature		-4°F to 140°F (-20°C to 60°C)			
Humidity Operation		20-85%, non-condensing			
Storage		10-90%, non-condensing			
Agency Approvals		CE (EMC), FCC Class B, CB, UL, cUL, CCC			
Dimension Length		15.86" (403 mm)			
Height		10.79" (274 mm)			
Width		10.24" (260 mm)			
Weight		23.81lbs (10.8 Kg), excluding consumables			
Options		Cutter (Dealer Install) Parallel port adaptor module (Centronic female 36-pin)(Dealer Install) Bluetooth (Dealer Installer) Wireless LAN (IEEE 802.11 b/g/n) (Dealer Install) External label rewinder Label Dispenser (Dealer Install)			

* Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

** Minimum print height and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height, and maximum print speed capability.

Applications

Applications for Labels & Barcodes

ZX400/400i series is as versatile as for most applications.



Retail

Receipt, Ingredient label, Price tag, Content Label, Registration receipt, Postal slip, etc.

Warehouses, logistic & Transportation

Case pack labels, address labels, product serial number labels, inventory management, shipping labels or related industrial applications.

Manufacturing


product label, manufacturing label, exterior/pallet label, trade, stoking and document management etc

GoDEX RIBBONS

High quality original GoDEX thermal transfer ribbons

GoDEX offers premium thermal transfer ribbons that will fit most of the printing application

- Wax
- Wax / Resin
- Resin
- Near Edge

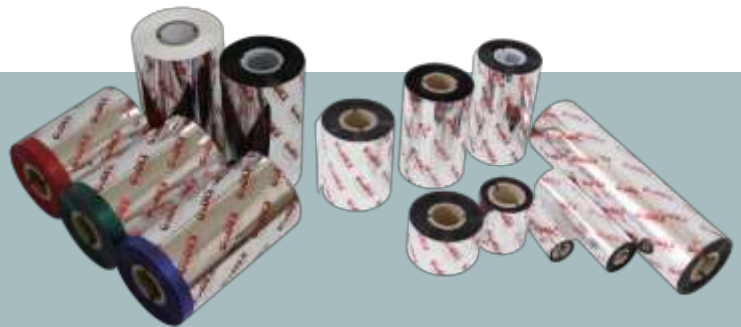

GoDEX LABEL DESIGN SOFTWARE

GoLabel Software / User Friendly

GoLabel is based on WYSIWYG (what you see is what you get) user interface, make everything to easy for you to create and print barcode labels. GoLabel is the first choice label design software that you cant miss it.

Go visit www.godexintl.com and download GoLabel to experience it!